da Vinci mini w+

Open Filament Project

XYZ PRINTING

Step1 Software Installation : XYZprint Beta 2.1.2

XYZprint Beta 2.1.2 :
Download link: https://support.fabistron.com/xyzprinting/downloads/XYZprint_2.1.2_2B15777.exe

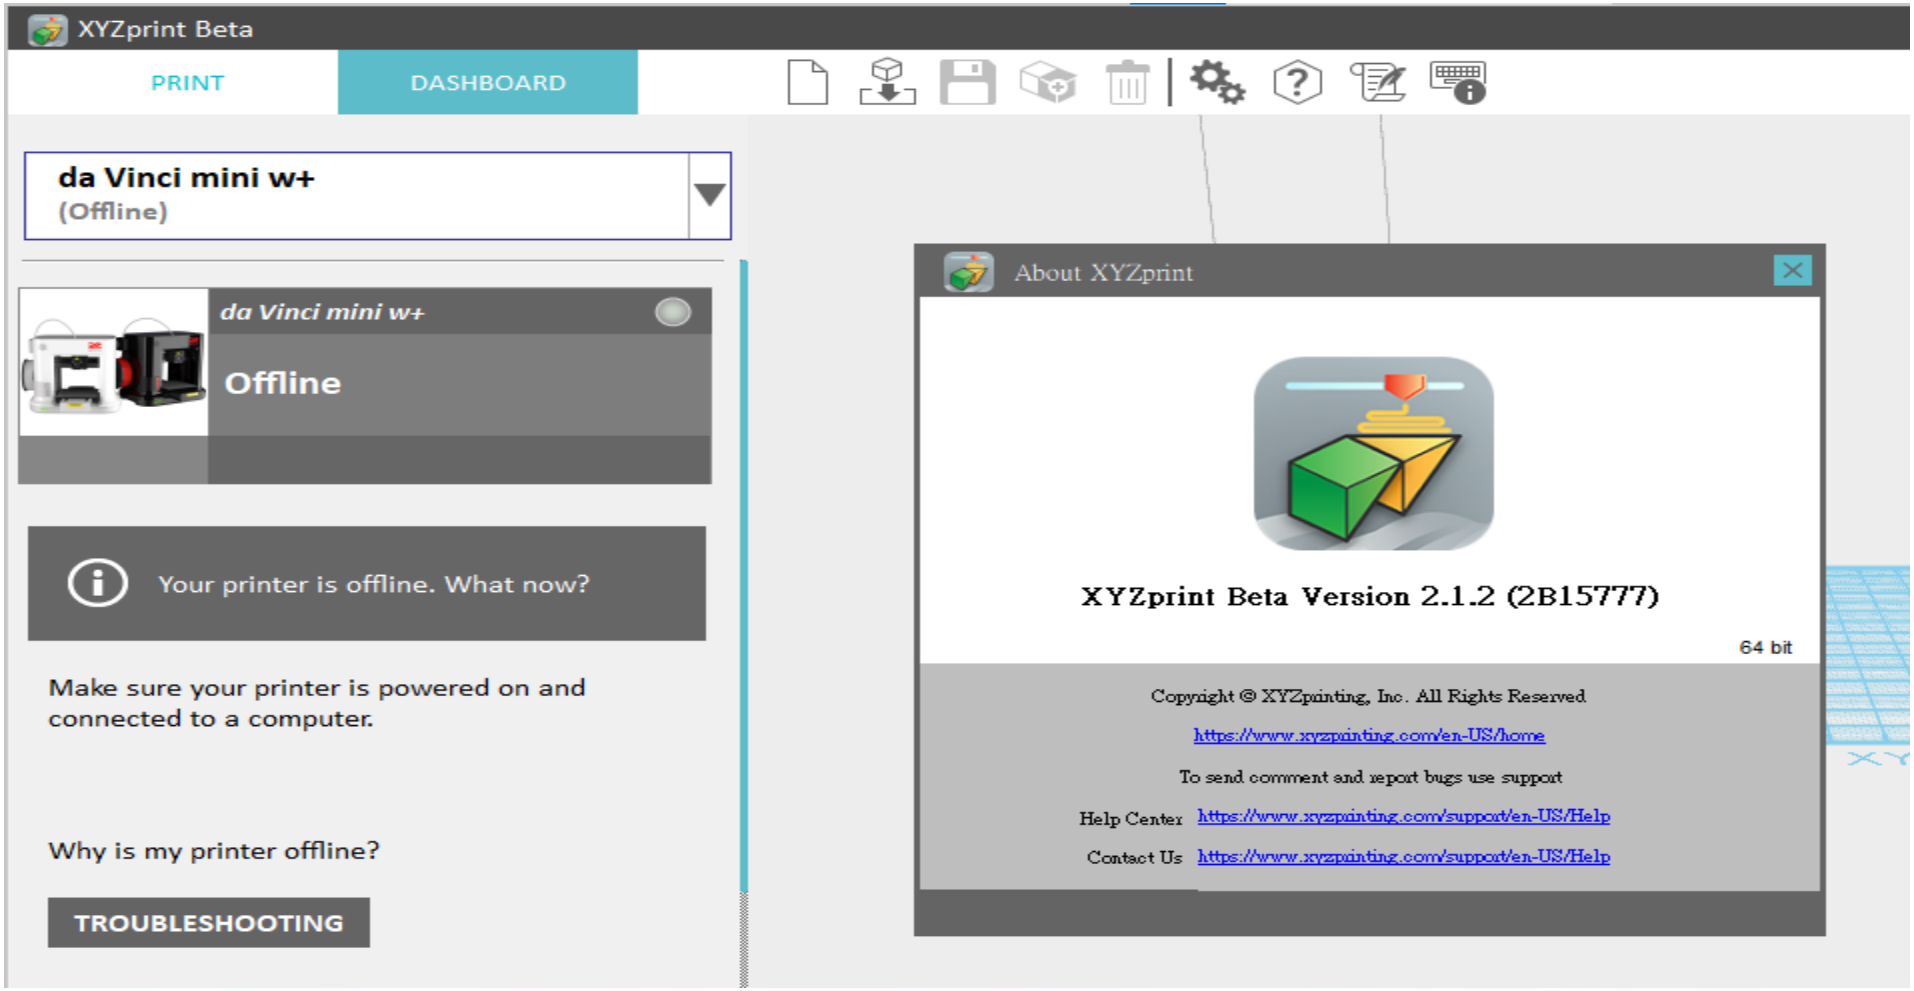

Step2 Com port confirm

After connecting the computer to the printer.

Check the device administrator to confirm the com port information with XYZ printer connected done.

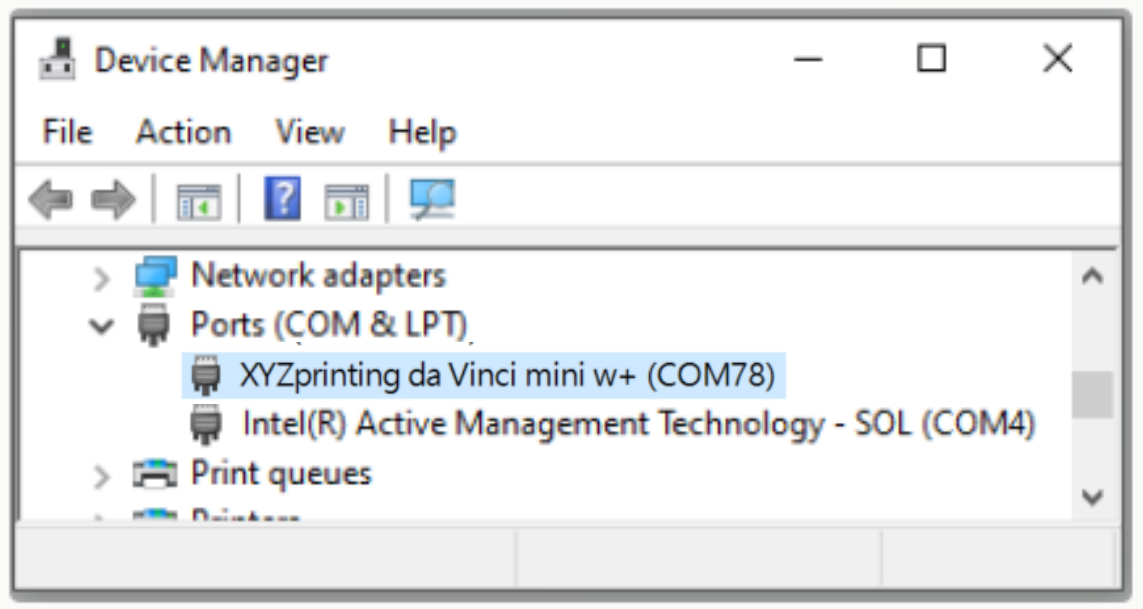

Step3 Terminal device check

Download AccessPort program and command XYZv3/query=p for Teriminal device check.

Donload link:

https://drive.google.com/drive/folders/1SK677fprQJ9sdavbpFnb_D3FMU02NfZo?usp=drive_link

AccessPort Note: - Make sure that no other program is connected to the Printer's com port.

1. Launch AccessPort，Choose "Setting" Logo button.

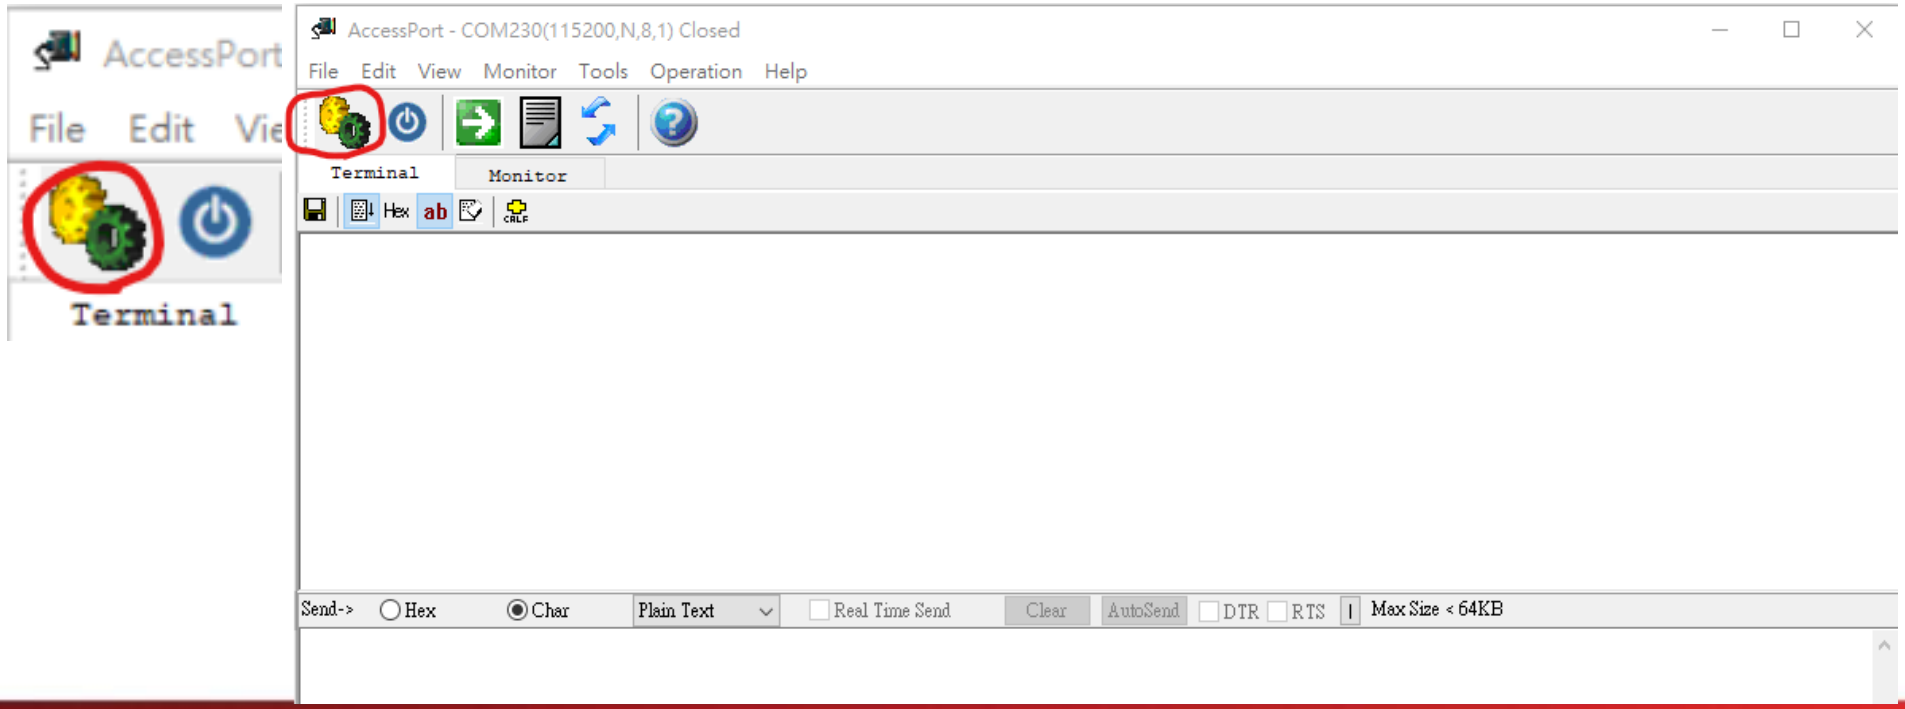

Step3 Terminal device check

2. Set Printer's com port as same as device manager com port then click "Sure" (O) button.

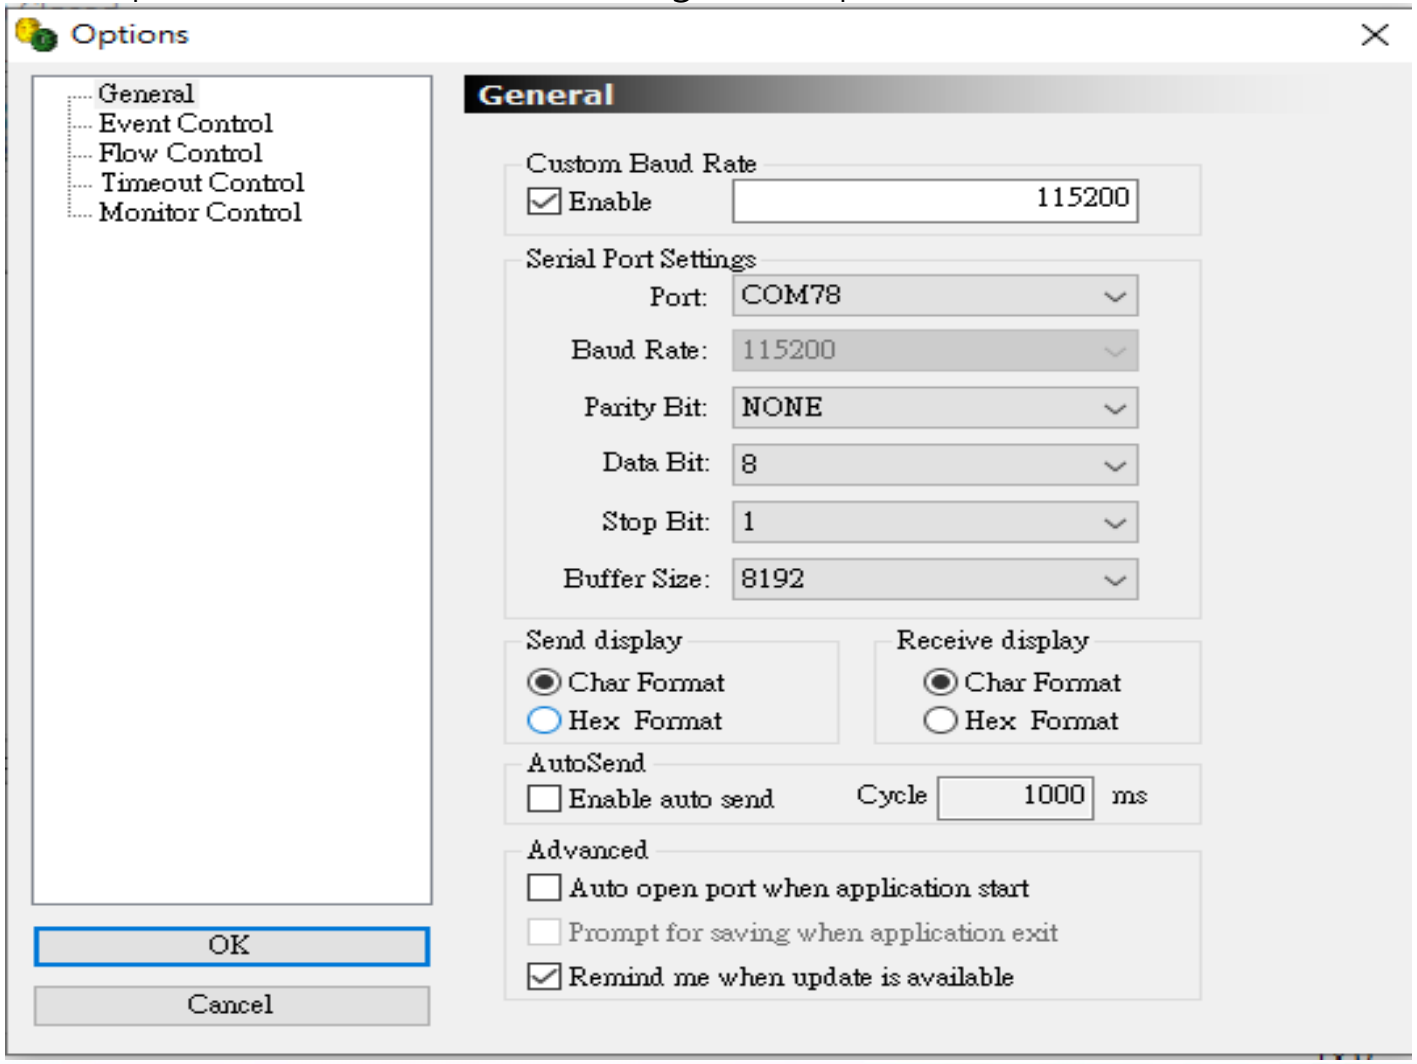

Step3 Terminal device check

3. After connection is down, program will show message “Opened” ,
   Then input command “XYZv3/query=p “ and sending it。

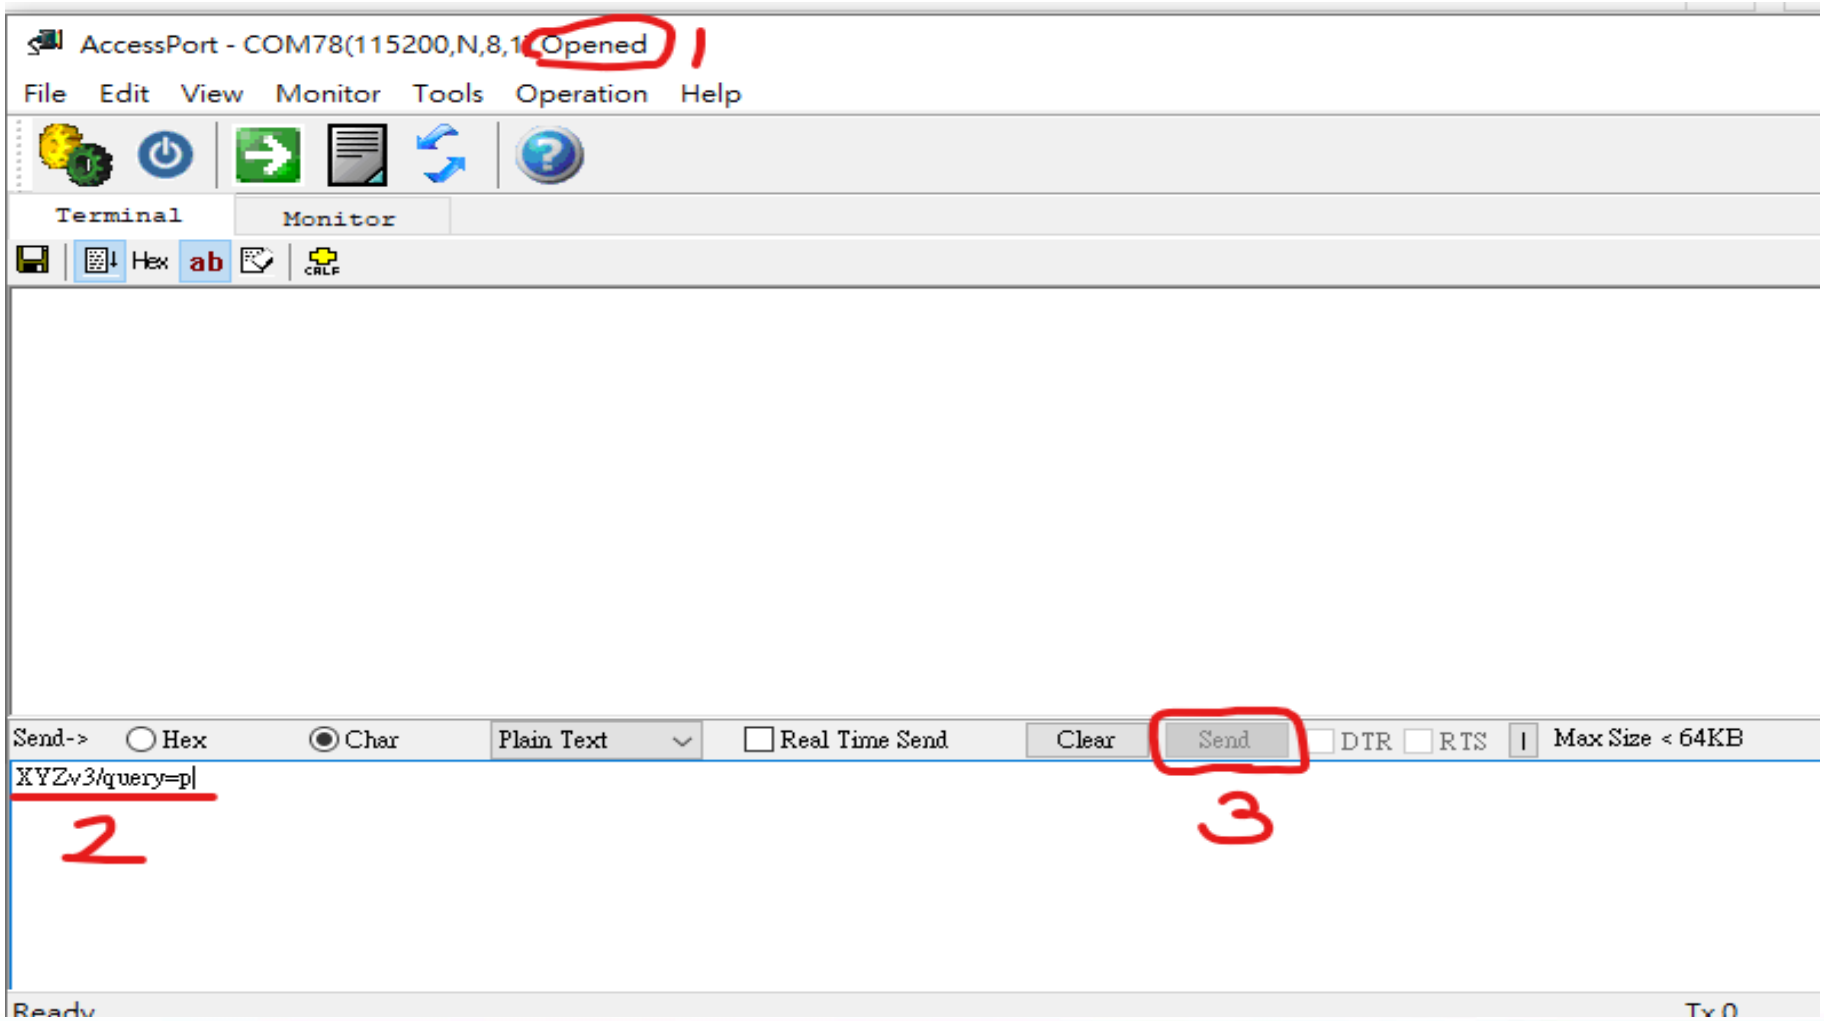

Step3 Terminal device check

4. After command sending, the printer model will be returned as red color circle。

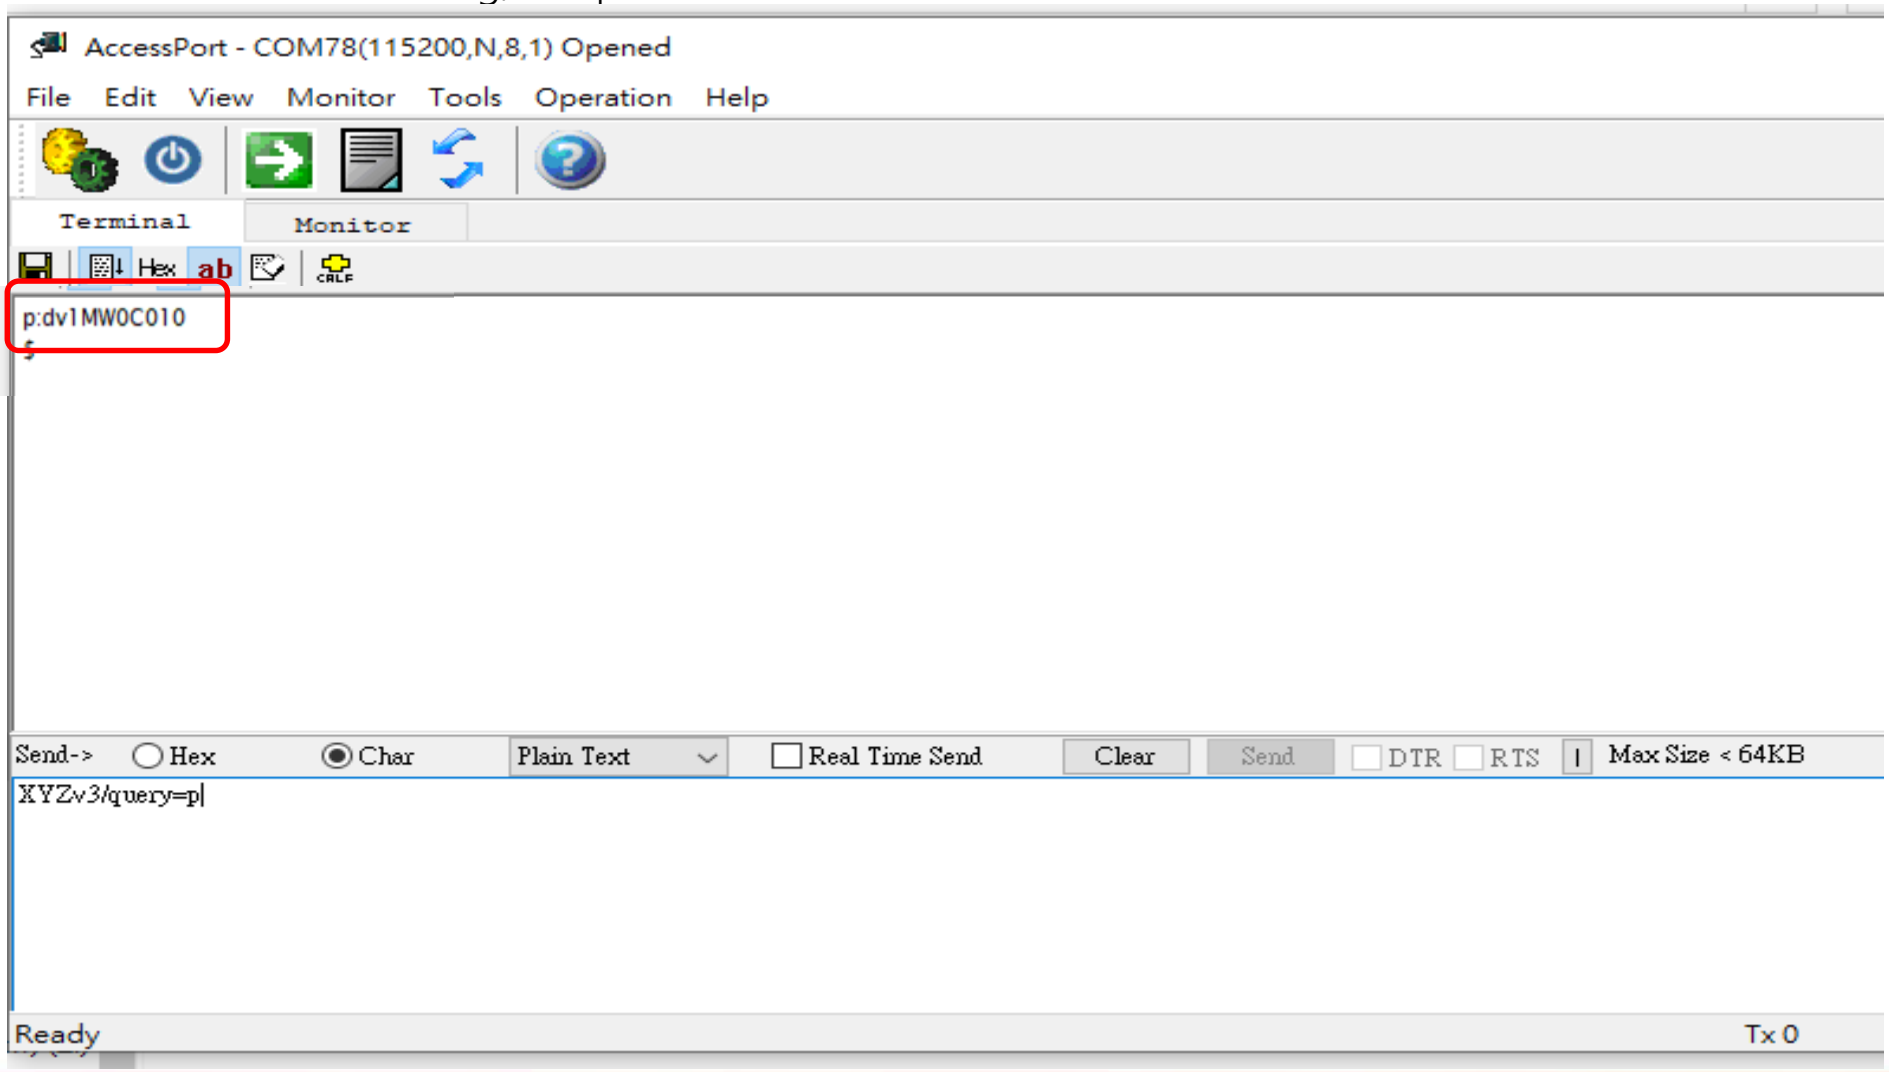

Step4 Confirm firmware version.

After confirming the printer model, check the corresponding firmware version program as sheet below and download it.

1	dv1MW0C010	miniW+(Telit) https://drive.google.com/drive/folders/1LpT69zYoIrSV7VpMSmqt_Y29JyPFIQVc?usp=drive_link
2	dv1MW0C000	miniW+(Qualcomm) https://drive.google.com/drive/folders/1JiwEPx-RxLInn49wcoenvZniGO0_YtWM?usp=drive_link

Step5 Upgrade firmware

Launch the firmware version program and update it then finish.

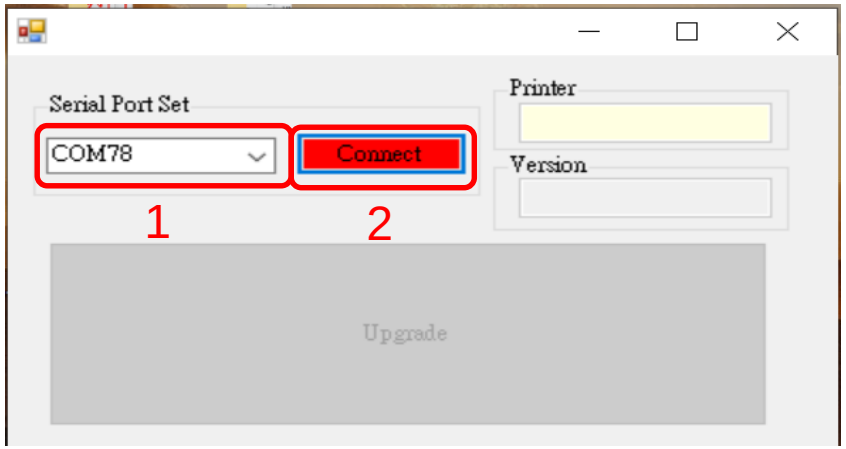

1. Launch program then choose Comport.

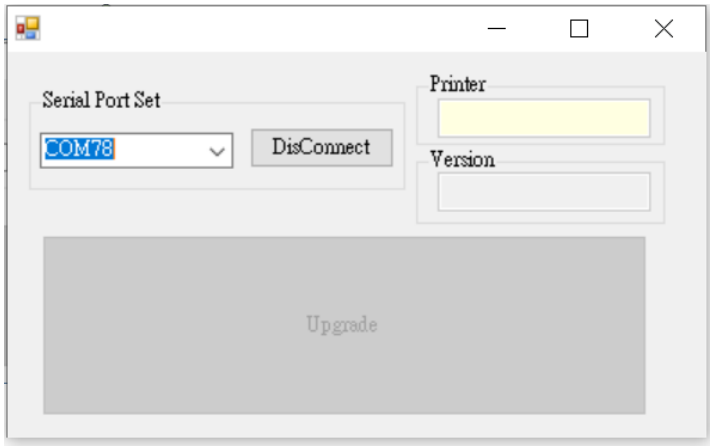

2. Click Connect button.

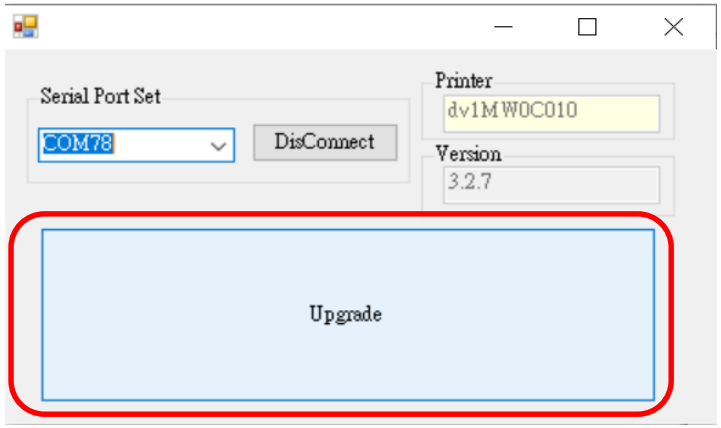

3. Click Upgrade button for firmware burning.

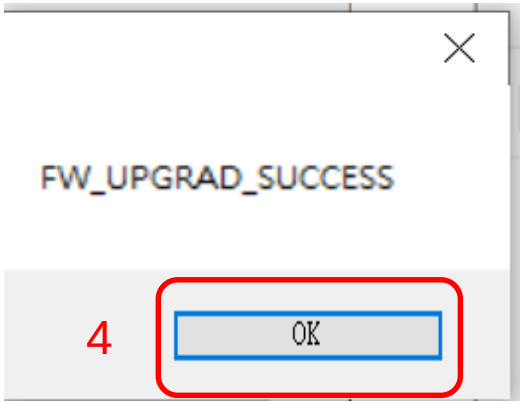

4. Click OK button after firmware burning.

* Notice
Please check does printer Reboot after firmware burning down.

THANK YOU